KÖNIG & MEYER
Stands For Music

Distanzrohr 21337

zur Verbindung von Satellitensystemen
belastbar bis 50 kg; mit Gewindebolzen M20

Aufstellanleitung

-Subwoofer **1** auf ebener Fläche positionieren
-Grundrohr **2** mit Gewinde M20 in Subwoofer einschrauben

Einstellung der Höhe
-Mit einer Hand Auszugrohr **4** festhalten.
-Mit anderer Hand Klemmschraube **3** lösen und anschließend Rastbolzen **5** ziehen (siehe **Abb. A**).
-Auszugrohr in gewünschte Höhe schieben.
-Rastbolzen in passendes Loch einrasten lassen und Klemmschraube wieder festdrehen (siehe **Abb. B**).


Montage der Boxen
Wahlweise durch Verwendung von
-Anschraubflanschen (z.B. 195/8, 24281) oder
-Flanschbuchsen (z.B. 196, 19654, 19656)
(zu beziehen über den Fachhandel)

Sicherheitshinweise

-Für ebenen Stand des Subwoofers **1** sorgen.
-Auf feste Schraubverbindung an Distanzrohr, Befestigungsplatte und Anschraubflasch achten.
-Rastbolzen **5** muß stets installiert sein.
-Unkontrolliertes Lösen der Klemmschraube **3** und des Rastbolzens **5** unter Last ist nicht zulässig.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz.

KÖNIG & MEYER GmbH & Co. KG
Kiesweg 2, 97877 Wertheim
Telefon: 09342/8060, Telefax: 09342/806-150
E-Mail: contact@k-m.de, Web: www.k-m.de
21337-000-55 Rev.29 / 21337-000-76 Rev.17 03-80-833-00 11/26

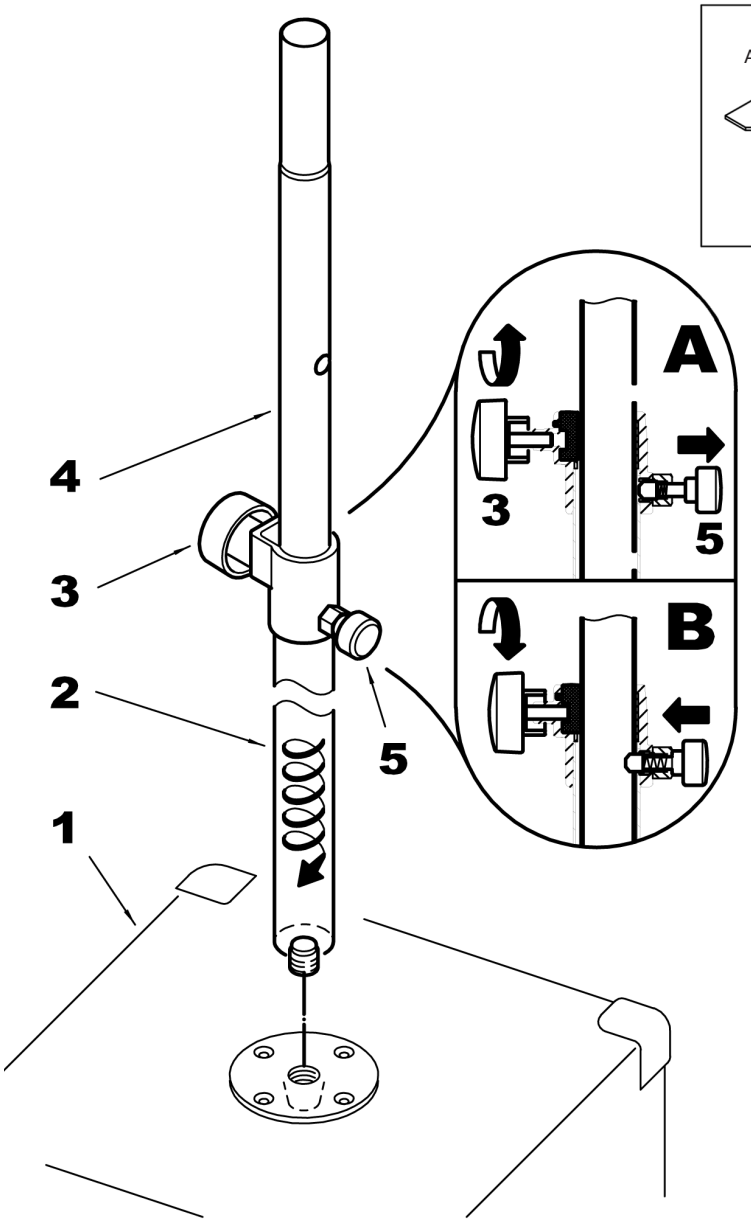

KÖNIG & MEYER
Stands For Music

Distance Rod 21337

To combine satellite systems
Load capacity up to 50 kg; with threaded bolt M20

How to set up the system

-Position the subwoofer **1** on an even surface.
-Screw the main tube **2** with the threaded bolt M20 in the connector plate of the subwoofer.

Adjustment of the height
-Hold the extension rod **4** with one hand.
-Loosen the locking screw **3** on the clamping element with the other hand and pull the safety bolt **5** (see **illustration A**).
-Adjust the extension rod **4** at the desired height and let the saftey bolt slide in the suitable hole.
-Securely tighten the locking screw **3** (see **illustration B**).

Mounting of the speaker
A choice of
-screw-on adapters (for example 195/8, 24281) or
-flange adpaters (for example 196, 19654, 19656)
can be used (Available in music retail stores).

Safety instructions

-Use the system only on even surfaces.
-Make sure that the locking mechanism on the rod combination and the connector plate is securely tightened.
-Always install the safety bolt **5**.
-Caution: Do not loosen any screws or pull out the safety bolt **5** while the speaker is mounted.

Distribution and reproduction of this document, utilization and communication of its contents are prohibited unless expressly permitted. Contraventions will result in compensation.

KÖNIG & MEYER GmbH & Co. KG
Kiesweg 2, 97877 Wertheim, Germany
Phone: +49 9342/8060, Fax: +49 9342/806-150
E-Mail: contact@k-m.de, Web: www.k-m.de
21337-000-55 Rev.29 / 21337-000-76 Rev.17 03-80-833-00 11/26

